

File Number : **EMC-032-2016**

CONTENTS

* <i>Front page</i>	<i>P 1</i>	
* <i>Revision history</i>	<i>P 2</i>	
* <i>Contents</i>	<i>P 3</i>	
* <i>Data Customer & E.U.T.</i>	<i>P 4</i>	
* <u><i>Radiated emission</i></u>		
- <i>Test Setup</i>	<i>P 5</i>	
- <i>Used equipment</i>	<i>P 6</i>	
- <i>Overview Test Results</i>	<i>P 7</i>	
- <i>Test Results</i>	<i>P 8</i>	<i>~ 9</i>

(1) = Not under accreditation

FCD-0370/5

QP-0017

TEST-PLAN

File Number : EMC-032-2016

- Name and address of the customer .

Name : ES Gear Ltd.

Contact person : Mr. Loic De Buck

Witness during testing :

Address : 9B Amtel Building
148 Des Voeux Road Central
Hong Kong

Tel/Fax : BGEMC-16-030

GSM : -----

BTW: -----

Offerte nr BGEMC :

Purchase Order: -----

- Description of the E.U.T.

File number BGEMC lab: EMC-032-2016

Name : Industruino

Manufacturer/ Brand : -----

Type : IND. I/O 32u4

Serial N°:

Quotation N° : -----

Part of : -----

Remark : -----

Short description of the functions : (photo) if applicable

None

PEMC date in :

PEMC date out :

Manual : No

- Measurements according following standard(s) :

EMC Compliant Testing according FCC Title 47. Part 15

Radiated Emission

Section 15.109

ANSI C63.4:2014

120 Vac/60 Hz

- Sampling method.

None

Sampling method :

If YES how :

- Subcontracting.

Yes

Tests : As customer required

Name subcontractor :

- Remarks and actions during measurements

Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

For contents of testplan Refer to QP-0017.

- Uncertainty :


(if the measured value is within the uncertainty of the measuring system, the uncertainty will be indicated into this report. The judge Pass/Fail will not be indicated)

- Temperature & humidity during measurements was between spec:

Humidity : min.: 30%	max.: 70 %	Actual 60%
Temperature: min. : 18°C	max.: 26 °C	Actual 25°C
Atmospheric pressure : 1011 hPa		-----
Mains Voltage : 120VAC 60Hz		-----
DC Voltage : -----		-----

DRAWING AND/OR PICTURE OF TEST SETUP

Test system : PEMC 01
According standard N° : FCC15.109 Radiated Emissions

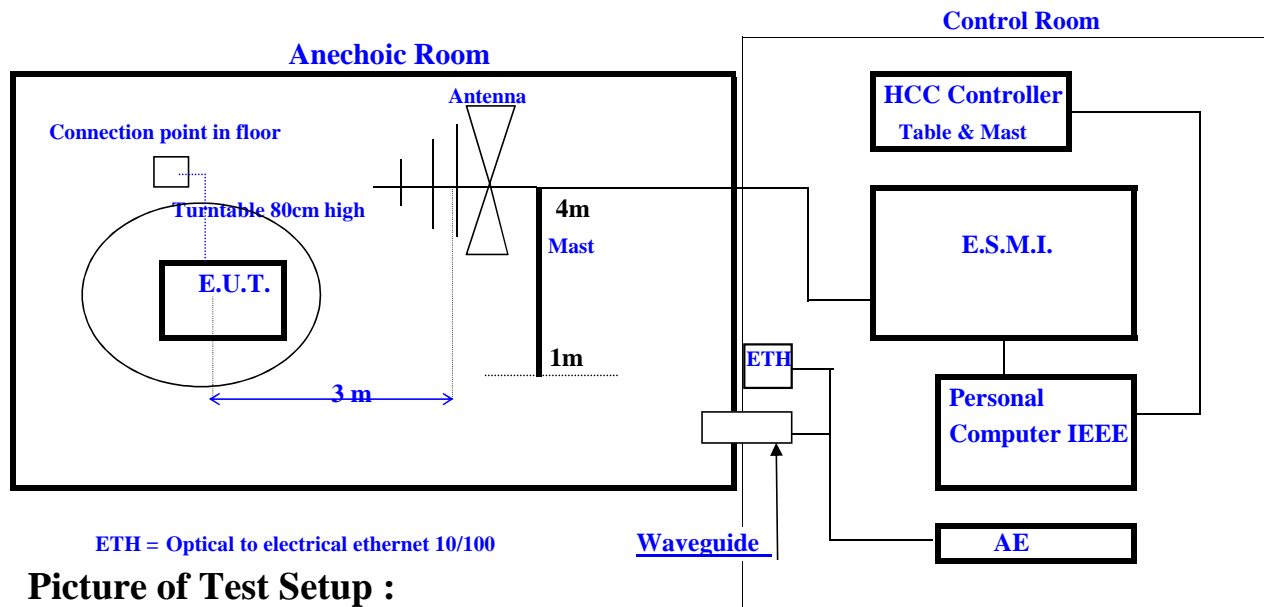

Picture of Test Setup :



USED EQUIPMENT DURING MEASUREMENT

Test system : **PEMC 01**

According standard N° : **FCC15.109**

Pemc N°	Description /type	Type	Serial n°	Certificat n°
PEMC 01-001	Automatic turntable, wooden, d=1.2m	HCT12	835822/0006	-
PEMC 01-002	Automatic antenna mast, mobile, h=4m	HCM	836622/0009	-
PEMC 01-003K	Bilog antenna 30 MHz-1GHz	CBL6111A	1556	201403394.00
PEMC 01-004	Mast adapter for mounting the Bilog Antenna on the mast	CBL-MASTAD		-
PEMC 01-005K	Impedance transformer 50 <-> 75 Ohm	RAM	840946/0011	-----
PEMC 01-006K	LISN 9 KHz - 30 MHz 2 * 10A, TWO LINE V-NETWORK ESH3-Z5	ESH3-Z5	840730/001	BGEMC20130808.01
PEMC 01-007K	LISN 100 KHz - 200 MHz 100A, 600V DC ESH3-Z6	ESH3-Z6	840522/005	BGEMC2013823.01 + xxx
PEMC 01-014K	EMI test receiver 20 Hz - 26.5 GHz	ESMI	839699/0010 & 840498/004	201403395
PEMC 01-019	Mast & turntable positioning controller	HCC	840760/0001	-
PEMC 01-030	RF Cabling	TS-CABLRF1		-
PEMC-01-031	DC Power supply cabling	TS-CABLPS1		-
PEMC 01-032	AC Power supply cabling	TS-CABLAC		-
PEMC 01-033	Fiber optic cable Field Probe	TS-CABFO		-
PEMC 01-034	Fiber optic Cable Mast	TS-CABFO		-
PEMC 01-035	Fiber optic cable Turntable	TS-CABFO		-
PEMC 01-036	IEEE 488bus (2*PCK-1m) cabling	TS-CABLCO1		-
PEMC 01-038K	Pre-amplifier A.R. 9 kHz - 2 GHz typ 29 dB	CPA9231A	3205 / 18564	-----
PEMC 01-039K	ESH3-Z6 V-network 5µH/50ohm LISN 100 kHz - 200 MHz 100A , 600V DC	ESH3-Z6	846422/027	201201796.00
PEMC 01-040K	Active rod antenna 9 kHz - 30 MHz	HFH2-Z6	844857/008	2014020474-1
PEMC 01-041K	RF cable Rod Antenna BNC-BNC	BNC-BNC	None	-----
PEMC 01-042	Power cable rod antenna	12 pin - 12 pin		-
PEMC 01-047	RF Cable magnetic loop antenna			-
PEMC 01-048	Connection cable magnetic loop antenna			-
PEMC 01-049K	RF- Cable Mast-Bilog ant			-----
PEMC 01-052K	Shielded Calibrated Magnetic field pick-up Coil 5 Hz - 10 MHz	HZ-10	847413/020	0
PEMC 01-058K	LOG-PER Antenna 1 GHz ~ 26GHz	HL 025	100193	201201797.00
PEMC 01-059K	Pre-amplifier 1 GHz ~ 26GHz	AFS	937326	201201840.00
PEMC 01-061K	4-WIRE ISN	ENY 41	100192	NA
PEMC 01-069K	Transient Limiter 10 dB (150kHz ... 30MHz)	HZ560	16981196	-

OVERVIEW TEST RESULTS

Test System : PEMC -01

According standard : FCC15.109 Radiated Emission

		Antenna Polarisation		Requests from customer	Remarks
		Horizontal	Vertical		
Test mode used					
Combined horizontal & Vertical .		X	X		
Used test setup and EUT placement/mode					
1	Set-up according client test plan with EUT 30 ~ 1000MHz	P	P		Powered 120V 60Hz
2		--	--		
3		--	--		
4		--	--		
5		--	--		
6		--	--		
7		--	--		
8		--	--		
9		--	--		
10		--	--		
11		--	--		
12		--	--		
13		--	--		
14		--	--		
15		--	--		

Validation	<input checked="" type="checkbox"/> Hardware	Legend	<input type="checkbox"/> P = Test Pass	<input type="checkbox"/> F = Test Fail
	<input checked="" type="checkbox"/> Software		<input type="checkbox"/> - = Test not performed/input not used	<input type="checkbox"/> X = Used Input

Measurement Unintentional Radiated Emissions

EMC-032-2016

EUT: IND.I/O 32u4
Manufacturer: ES Gear Ltd.
Operating Condition: 120VAC 60Hz
Test Site: Blue Guide EMC Lab
Operator: Willems jan
Test Specification: FCC15.109 Class A 30MHz ~ 1GHz
Comment: connected to the ethernet
Start of Test: 5/02/2016 / 13:42:02

SWEEP TABLE: "FCC15.109"

Unit: dBuV/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

Subrange 1:

Start Frequency: 30.0 MHz
Stop Frequency: 1.0 GHz
Measure Time: 360.0 ms
IF Bandwidth: 100 kHz

Receiver: ESXI Transducer: CBL61113M
Signal Path: None System Transducer: None
Meas. Mode: Lin Add. Transd. 1: AC CP2 (X10) - ANT
Tracking Gen.: Off Add. Transd. 2: AC CP2 (X10) - RFIN2
Input: 2DC Add. Transd. 3: PEMC01-038K

SCAN TABLE: "FCC15.109 30-1000MHz"

Unit: dBuV/m


Detector: Mode:

Curve 1: QuasiPeak MaxHold

Subrange 1:

Start Frequency: 30.0 MHz Step Size: 50.0 kHz
Stop Frequency: 1.0 GHz
Measure Time: 100.0 ms
IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL61113M
Signal Path: None System Transducer: None
Meas. Mode: Lin Add. Transd. 1: AC CP2 (X10) - ANT
Tracking Gen.: Off Add. Transd. 2: AC CP2 (X10) - RFIN2
Input: 2DC Add. Transd. 3: PEMC01-038K

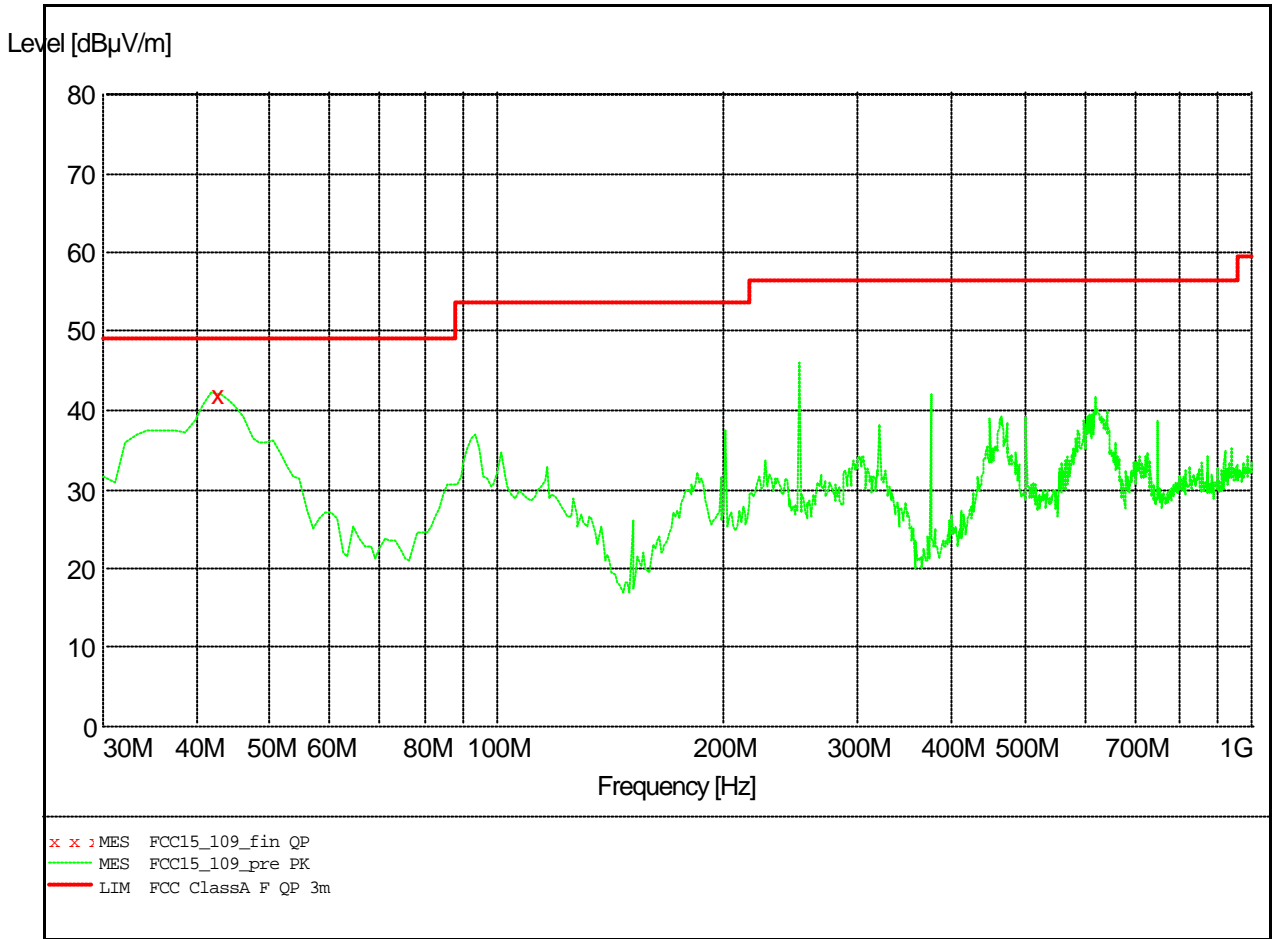

MEASUREMENT RESULT: "FCC15_109_fin QP"

5/02/2016 13:56

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
42.150000	42.00	-15.5	49.0	7.0	100.0	249.00	VERTICAL